



Corrigendum

Corrigendum to “Highly cost-effective shielding composite made from vanadium slag and boron-rich slag and its properties” [Radiat. Phys. Chem. 141 (2017) 239–244]



Mengge Dong^{a,b,*}, Xiangxin Xue^{a,b,*}, He Yang^{a,b}, Zhefu Li^c

^a Department of Resource and Environment, School of Metallurgy, Northeastern University, Shenyang 110819, China

^b Liaoning Provincial Key Laboratory of Metallurgical Resources Recycling Science, Shenyang 110819, China

^c Shanghai Institute of Applied Physics, Chinese Academy of Sciences, Shanghai 201800, China

The authors regret that they did mistakes for the Fig. 8 and Fig. 10. The corrected figures are given below.

We need to stress that these errors do not affect the discussion and conclusion of our paper. The author would like to apologise for any inconvenience caused.

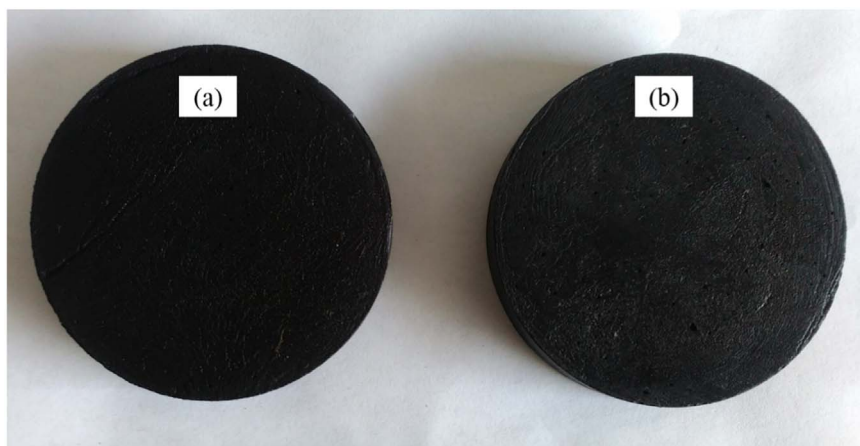


Fig. 8. Macro photograph of composite Y5 without irradiation (a) and under irradiation (b).

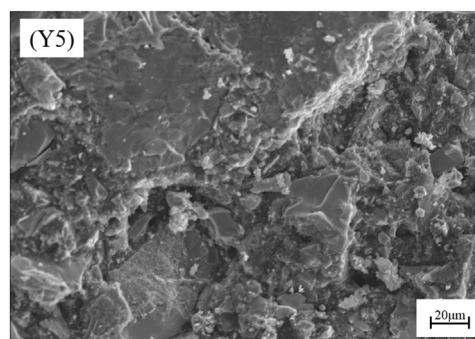


Fig. 10. SEM image of fracture surface of composite Y5 under irradiation.

DOI of original article: <http://dx.doi.org/10.1016/j.radphyschem.2017.07.023>

* Corresponding author at: Department of Resource and Environment, School of Metallurgy, Northeastern University, Shenyang 110819, China.

E-mail addresses: mg_dong@163.com (M. Dong), xuexx@mail.neu.edu.cn (X. Xue).

<http://dx.doi.org/10.1016/j.radphyschem.2017.10.016>

Available online 08 November 2017

0969-806X/ © 2017 Elsevier Ltd. All rights reserved.